




BAMBOO JUNGLE


TREKFIT System

2020

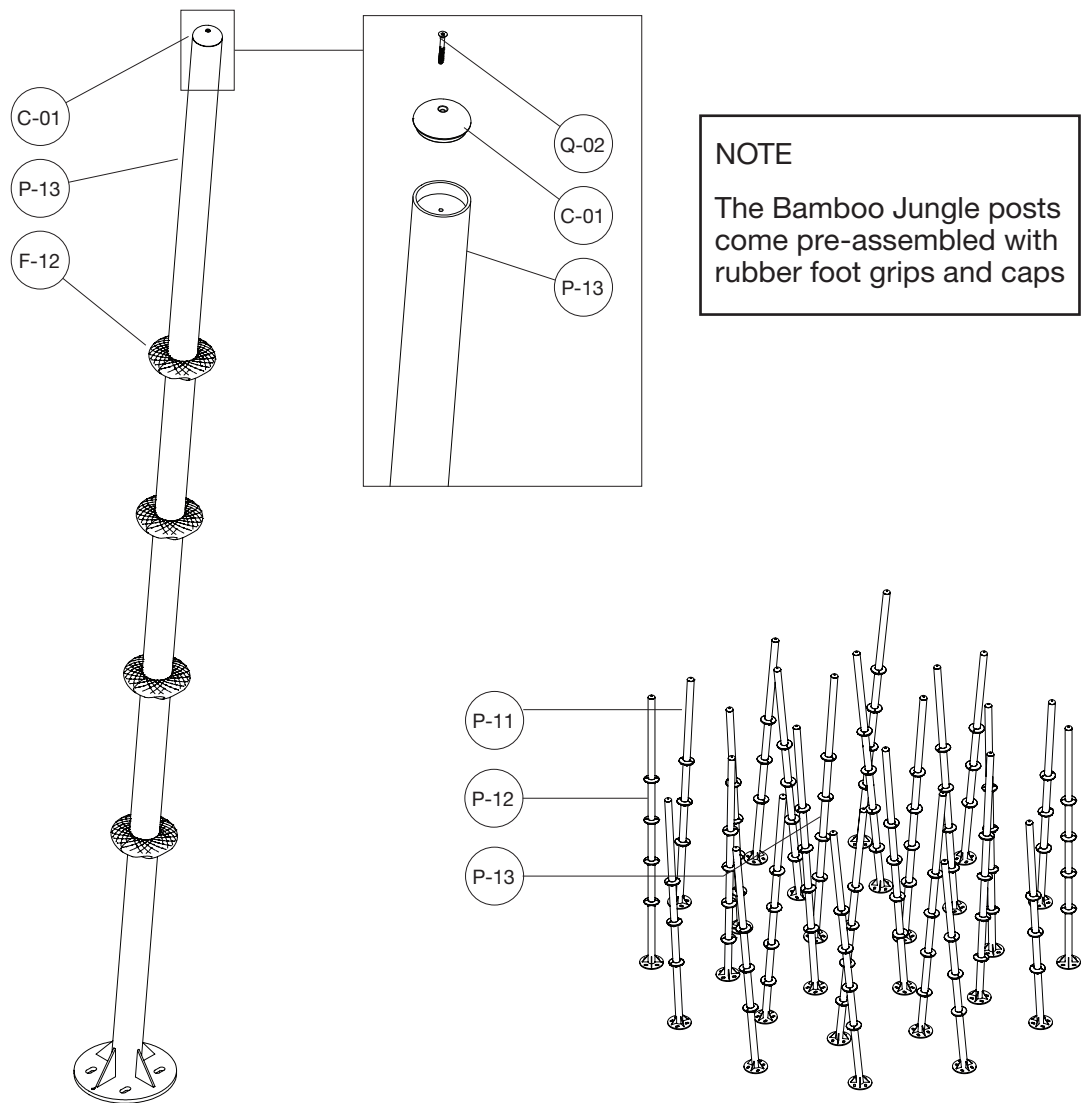


FOR REPLACEMENT PARTS, CONSULT THE CHART BELOW FOR PART NUMBERS

CODE	DESCRIPTION	MATERIAL
C-01	Cap 3-1/2" Ø	UHMW black polyethylene
C-12	Bamboo Insert Left + Right	Delrin
P-11	Bamboo post 11'	Zinc plated steel
P-12	Bamboo post 12'	
P-13	Bamboo post 13'	
Q-02	Anti-theft countersunk screw T30 Torx 1/4-20 x 2-1/4"	Stainless steel
Q-17	Hex nut 3/8-16"	
Q-18	Anti-theft button head screw T45 Torx 3/8-16 x 1-1/4"	
Q-26	3/8 Washer Mil spec	
F-12	Bamboo grip	EPDM

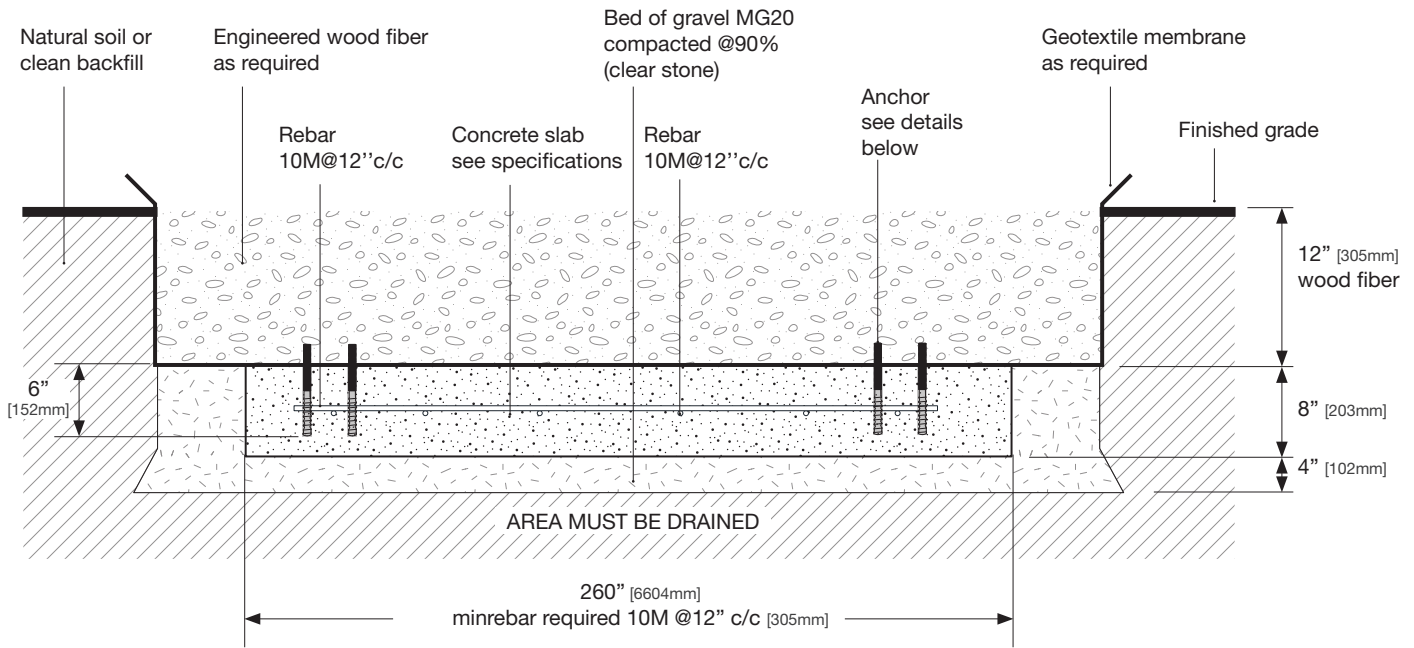

CONCRETE SLAB side view

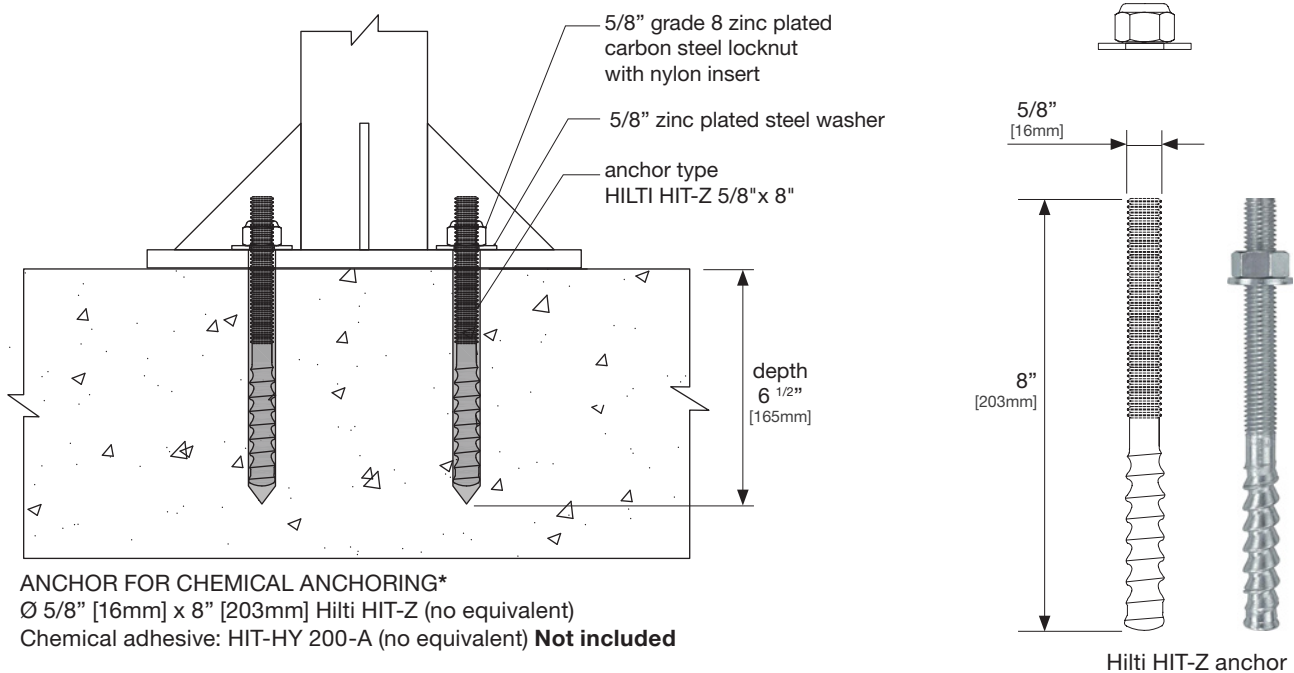

*Anchors, washers and locknuts are included with the Bamboo Jungle

NOTES:

1. Use ARM.CSA G30.18-M92 400W. Galv. G164
2. The concrete must be mixed to achieve a minimum compression strength of 30 MPa @ 28 days with 4-6% air entrainment.
3. The anchor bolts must be Hilti type HIT-Z 5/8" x 8" zinc plated carbon steel, no equivalent

BAMBOO JUNGLE - 26 POSTS

EQUIPMENT ASSEMBLY

4



of 8

Number of posts
per size

P-11 : 8

P-12 : 10

P-13 : 8

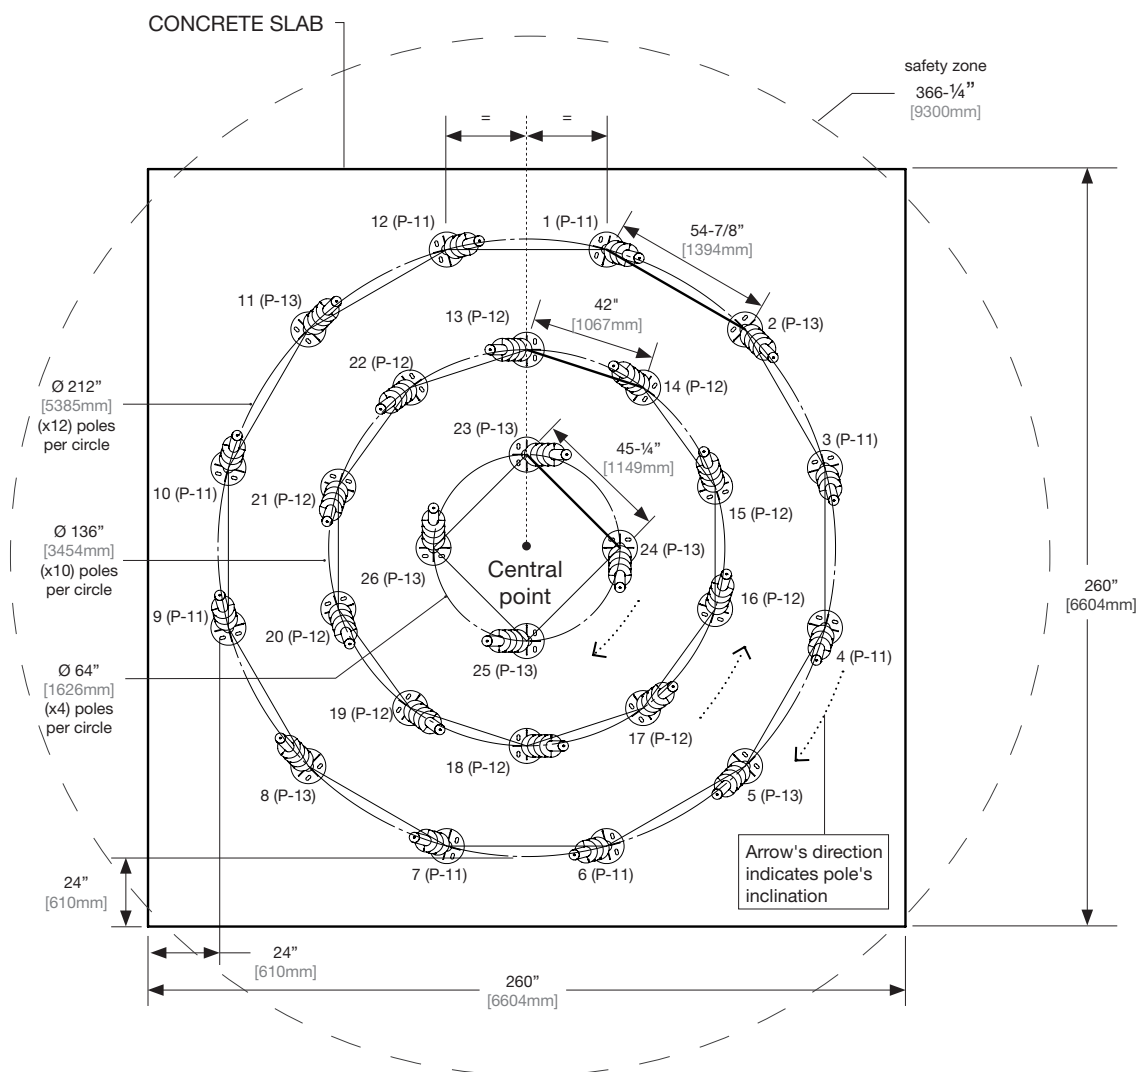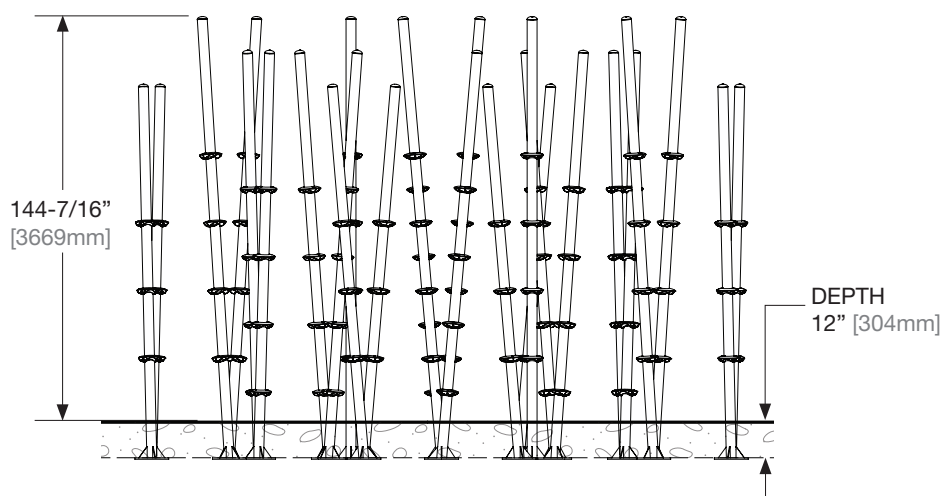

BAMBOO JUNGLE - JUNIOR - 26 POSTS

EQUIPMENT ASSEMBLY

5


of 8

Number of posts
per size

P-11 : 8

P-12 : 10

P-13 : 8

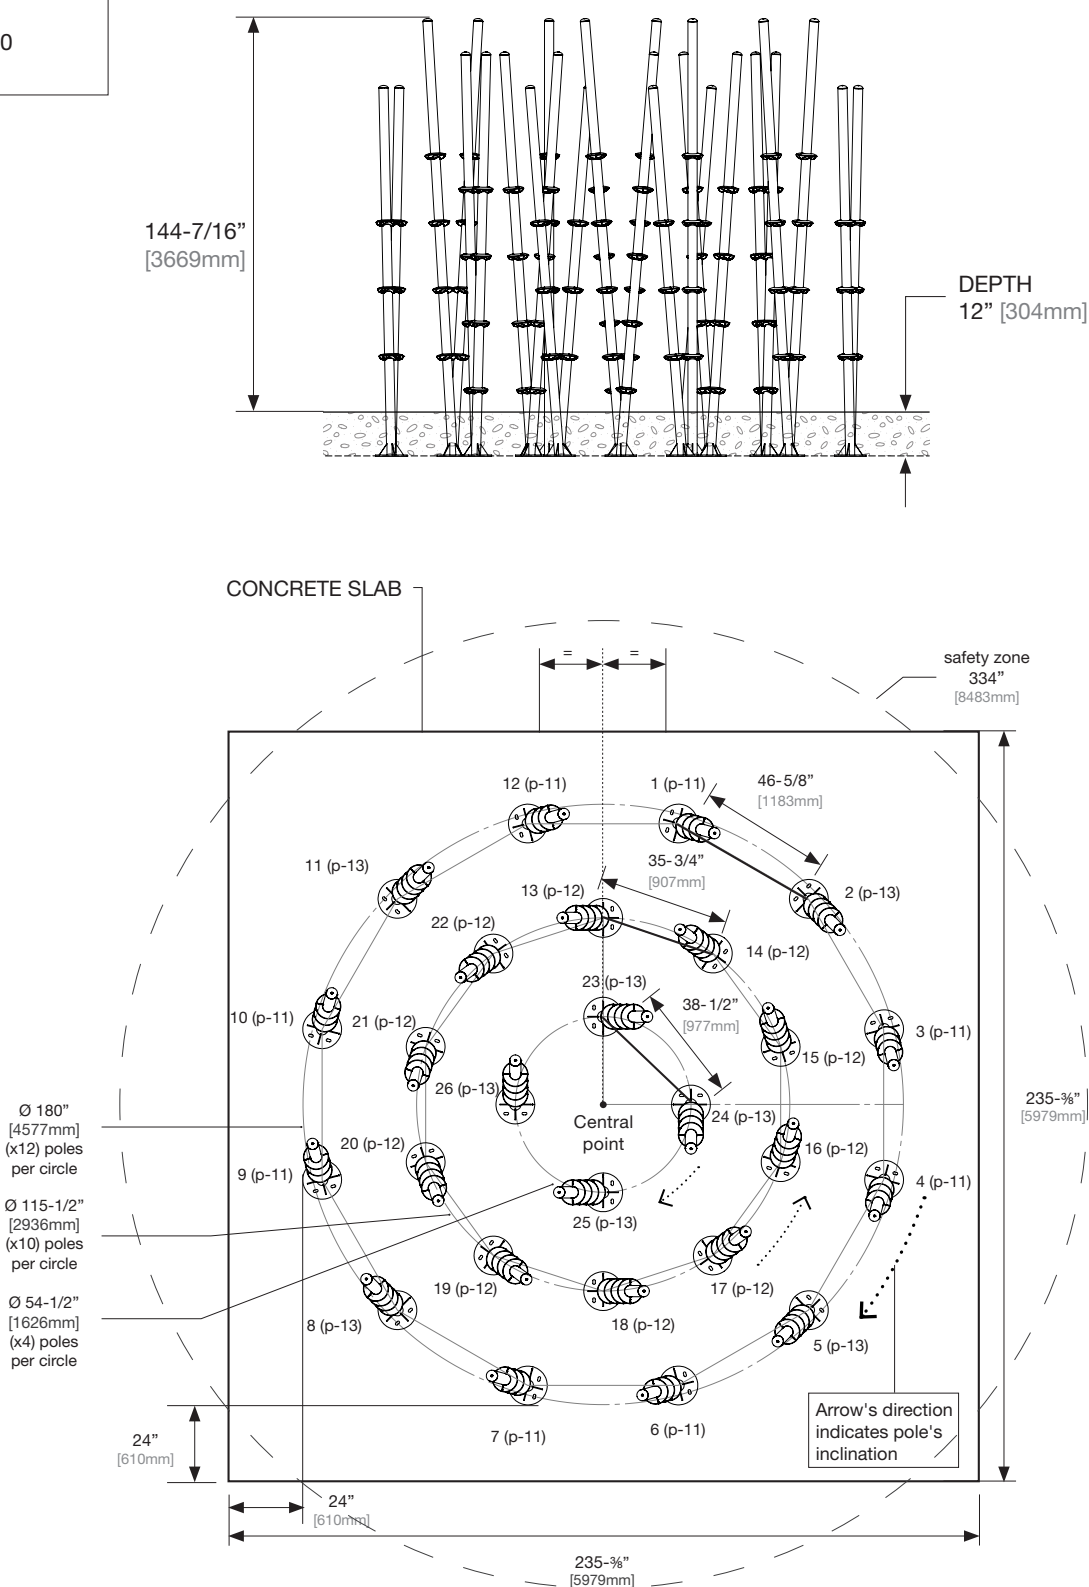

BAMBOO JUNGLE - 44 POSTS

EQUIPMENT ASSEMBLY

6

of 8

Number of posts
per size

P-11 : 8

P-12 : 28

P-13 : 8

144-7/16"
[3669mm]

DEPTH
12" [304mm]

CONCRETE SLAB

safety zone
444"
[11278mm]

Ø 288"
[7315mm]
(x18) poles
per circle

Ø 212"
[5385mm]
(x12) poles
per circle

Ø 136"
[3456mm]
(x10) poles
per circle

Ø 64"
[1626mm]
(x4) poles
per circle

24"
[610mm]

24"
[610mm]

361-3/8"
[9177mm]

361-3/8"
[9177mm]

Central point

Arrow's direction
indicates pole's
inclination

BAMBOO JUNGLE - LINEAR -26- POSTS

7

EQUIPMENT ASSEMBLY



of 8

Number of posts
per size

P-11 : 8

P-12 : 8

P-13 : 10

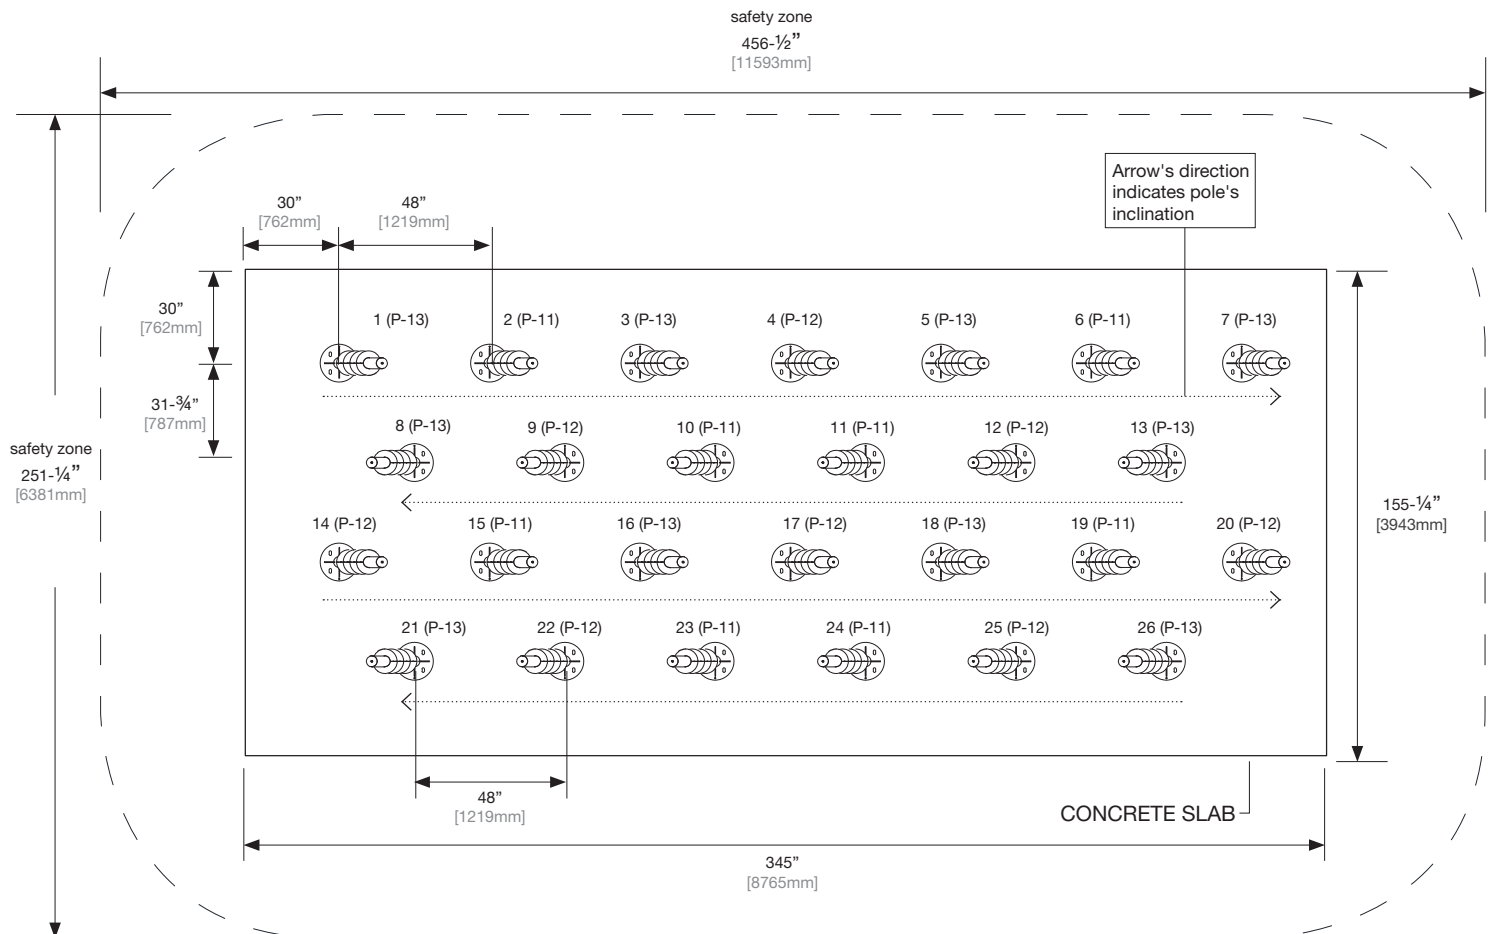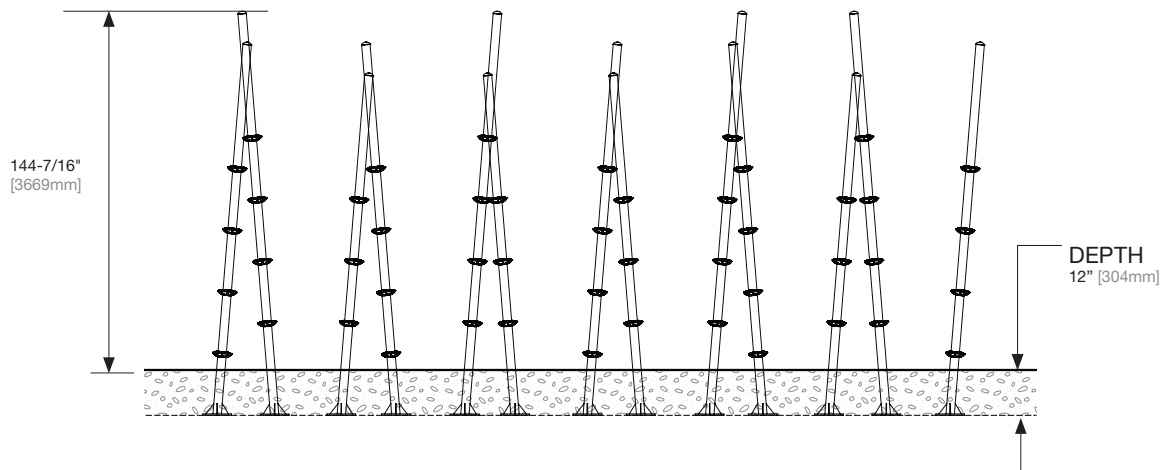

BAMBOO JUNGLE - FIGURE 8-26 POSTS

8

EQUIPMENT ASSEMBLY

of 8

Number of posts
per size

P-11 : 8

P-12 : 8

P-13 : 10

